

绿态宇能（上海）能源科技有限公司

SHANGHAI GREEN TECH CO.,LTD.

GT SPL 产品规格书

1. 产品特点 Features

圆柱外形结构，能量密度高；
Cylindrical radial leads, high energy density.
符合 ROHS 标准，无 Cd、Pb 等污染物质；
RoHS compliant, Cd, Pb free.
充放电循环寿命长：≥100,000 次
Long cycle life ≥100,000 times
高能量，适合作为备用电源。
High energy, suit for back up power supplier.



2. 应用 applications

可用于智能电表、燃气表、水表、热量表断电关阀的数据保存，抄表系统等。
Widely use in smart electric meters, gas meters, water meters, energy meters for back up power to record the data and remote meters reading and so on.


3. 型号命名规则 Part Number System

GT	S	□	□ □ □	□ □ □	□	□	□	□	□	□	□	□
Brand	Super	Series		Rated Voltage		Capacitance		Tolerance		Size		Status
GTCAP	capacitor	Code	Series	Code	Voltage	Code	Value(F)	Code	Tolerance	Code	Terminal	Code
		P	Power	2R5	2.5V	104	0.1	J	±5%	0813	8*13	S=Standard
		E	Energy	2R7	2.7V	224	0.22	K	±10%			C=Customized
		M	Module	3R3	3.3V	474	0.47	M	±20%			
		PP	Big Power	5R0	5.0V	105	1.0	U	-10%~20%			
		PH	Hi-Temp P	5R5	5.5V	205	2.0	V	10%~30%			
		EH	Hi-Temp E	6R3	6.3V	475	4.7	Z	-20%~80%			
		MH	Hi-temp M	012	12V	106	10					
		ML	Military	016	16V	206	20					
		PL	Hybrid	024	24V	506	50					
				036	36V	107	100					
				048	48V	367	360					
				056	56V	407	400					
				075	75V	657	650					
				100	100V	158	1500					
				120	120V	308	3000					
				240	240V	508	5000					
						758	7500					
						958	9500					
						109	10000					
						129	12000					
						169	16000					
						609	60000					

4. 产品性能 specifications

No.	产品型号 Part Number	GTSPL-3R8-206MR0813
1	额定电压 Rated Voltage	3.8V
2	最低工作电压 Min. Operating Voltage	2.5V
3	浪涌电压 Surge Voltage	4.2V
4	标称容量 Rated Capacitance	20F
5	容量允许公差 Capacitance Tolerance	-20%~+20%
6	最大交流内阻 Max. ESR/AC @1KHz	300mΩ
7	最大直流内阻 Max. ESR/DC	650mΩ
8	额定充电电流 Rated Charge-discharge Current	0.125A
9	最大充电电流 Max.Charge-discharge Current<5s	0.8A
10	自放电电流 3 个月 Self-discharge 3 months	≤ 1.5μA
11	最大漏电流 Max. Leakage Current 72hrs	≤ 4μA
12	工作温度 Operating Temperature	-20°C~+65°C
13	存储温度 Storage Temperature	10°C~+55°C
14	循环寿命 Cycle Life	>100,000 times
15	重量 Weight	1.5g

5. 标准产品外形尺寸图 shape of standard product

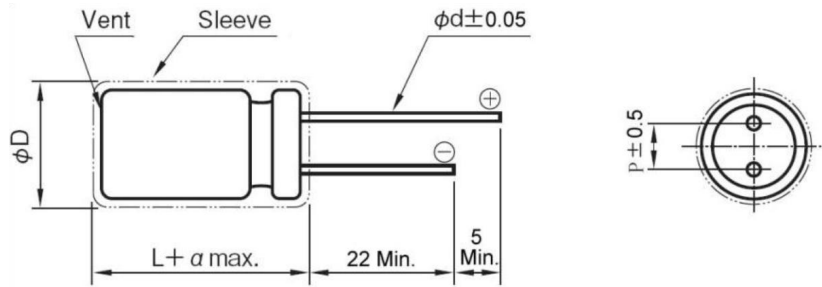


Part Number	$\Phi D \pm 0.5$ (mm)	$L \pm 1.5$ (mm)	$p \pm 0.5$ mm	$\Phi d \pm 0.05$ (mm)
GTSP-3R8-206MR0813	8	13	3.5 ± 0.5	0.6

6. 性能特性 Technical Information


序号	项目 Items	性能 Performance	测试方法 Testing Method
6.1	高低温特性 High-low Temp. properties	电容(-20℃): 初始测量值的±30% 内阻(-20℃): ≤初始规定值的10倍 电容(+65℃): 初始测量值的±30% 内阻(+65℃): ≤初始规定值的2倍	见 8.5
6.2	过充电特性 Over-charge properties	电容: 初始测量值的±10% 内阻: ≤初始规定值的2倍	见 8.6
6.3	高温高湿存储特性 High temp. and high humidity storage properties	电容: 初始测量值的±30% 内阻: ≤初始规定值的2倍	见 8.7
6.4	充电/放电循环特性 Charge/discharge cycling properties	电容: 初始测量值的±30% 内阻: ≤初始规定值的4倍	见 8.8
6.5	高温浮充性能 Floating test at high temp.	电容: 初始测量值的±30% 内阻: ≤初始规定值的4倍	见 8.9
6.6	外观 Appearance	没有明显的渗漏, 变形, 污点, 伤痕, 锈蚀和毛刺。	

7. 其它信息 Other Technical Information


❖ 倍率放电容量变化 Capacitance changes at different discharge rate

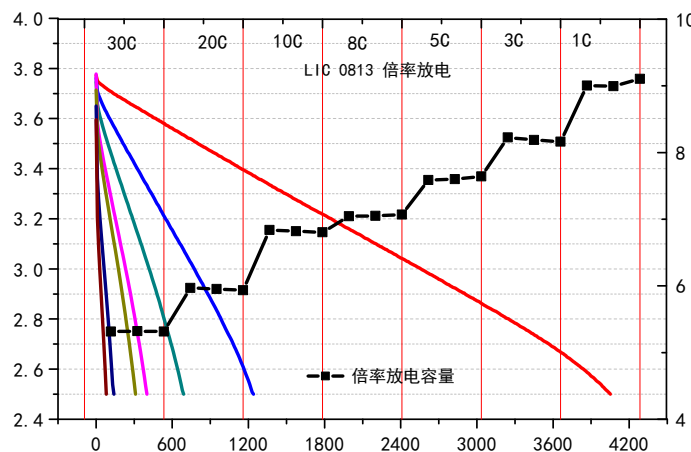

❖ 低温放电容量变化 Capacitance changes at low temp. discharge condition

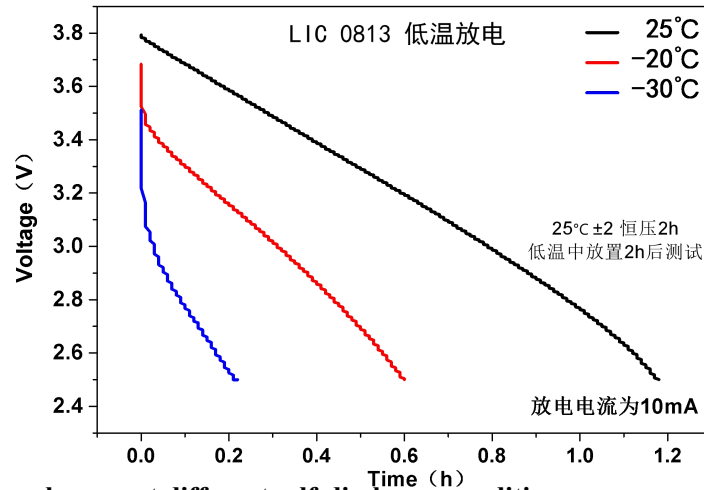

❖ 自放电电压变化 Voltage changes at different self-discharge condition

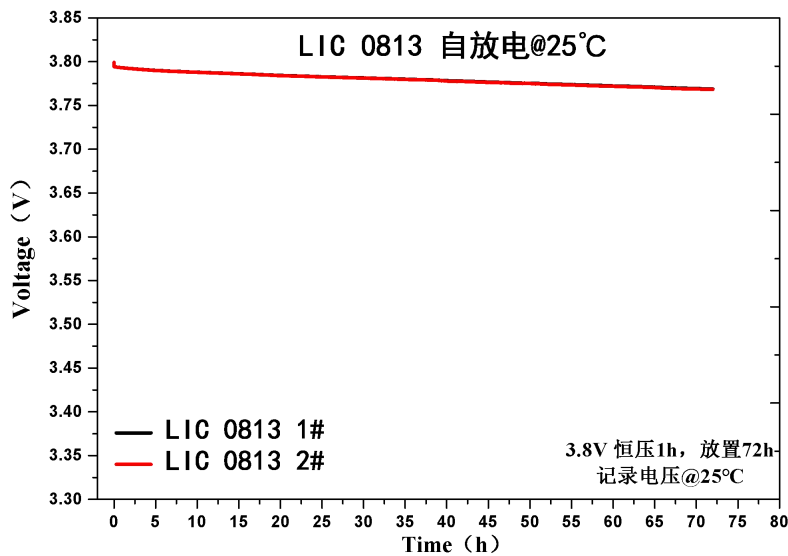

8. 产品测试方法 Testing Methods

8.1 测试条件 Testing Conditions

本产品规格书标准测试条件为：标准大气压下，温度 $25 \pm 2^\circ\text{C}$ ，相对湿度小于65%。

This specification followed the standard testing criteria: 1 atm, $25 \pm 2^\circ\text{C}$ and a relative humidity < 65%.

8.2 测量工具要求 Testing Demands for Tools

❖ 尺寸：必须使用 JIS B 7503 / KS B 5206(千分尺)，JIS B 7507 / KS B 5203-2(游标卡尺) JIS B 7502 / KS B 5205 / KS B 5202 (外部千分尺) 或精度等级相同的仪表。

Size: Need to use JIS B 7503 / KS B 5206 (Micrometer), JIS B 7507 / KS B 5203-2(Vernier caliper) JIS B 7502 / KS B 5205 / KS B 5202(External micrometer) or other same precision grade devices.

❖ 直流电压表：必须使用0.2级的JIS C 1102 / KS C 1303-2 (电动指示仪) 度相同或更高等级的仪表，其输入电阻超过 $10\text{M}\Omega$ 。

DC Voltmeter: Need to use 0.2 grade type JIS C 1102 / KS C 1303-2(Electric Indicator) or much high precision devices, its internal resistance should over $10\text{M}\Omega$

❖ **直流电流表和交流电流表:** 必须使用0.2级的JIS C 1102 / KS C 1303-2 (电动指示仪) 度相同或更高等级的仪表, 其输入电阻超过10MΩ。

DC Ammeter and AC Voltmeter: Need to use 0.2 grade type JIS C 1102 / KS C 1303-2(Electric Indicator) or much high precision devices

8.3 容量测试 Test for Capacitance

依据图1所示, 设定充电电压(E)后(参照表1), 将SW开关转向1处进行充电, 根据表1中充电时间(T)与充电电压(V)的要求, 借助保护电阻(R)进行充电。当达到规定充电时间后, 将开关SW转向2, 按照表2中的放电电流(I)进行恒流放电, 记录产品从起始电压(V_1)至结束电压 V_2 过程所用时间($T_d=T_2-T_1$), 依据下述公式计算产品容量(C):

According to Fig. 1, setting the charging voltage (E, Based Table 1), put the switch SW to 1 for charging. And based on the Charging Time (T) and Charging Voltage (V)' s requirements, charge the cell by using Protection Resistance (R). Once reached the Charging Time, switch the SW to position 2, meantime, galvanostatic discharge the cell to the target voltage with the discharge current (Table 2). Record the time between the starting voltage V_1 and the ending voltage V_2 ($T_d=T_2-T_1$), finally, Calculating the Capacitance (C) by the following formula:

$$C = \frac{I \times (T_2 - T_1)}{V_1 - V_2}$$

其中, C为测试样品的容量(F), E为直流恒压电源(V), R为保护电阻(Ω), V为直流电压表, I为恒流负载装置, A为直流电流表

Specifically, C was the cell' s capacitance(F), E named the DC constant power (V), R was the protection resistance(Ω), V was the DC Voltmeter, I was the constant current load, A was the DC ammeter.

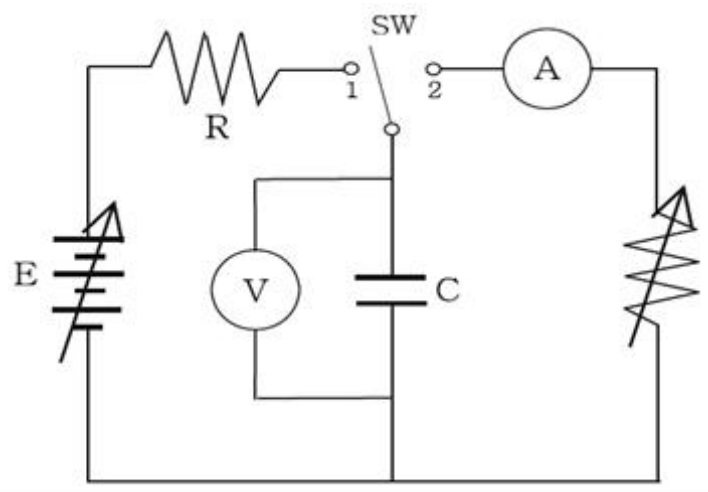


图1 容量测试电路图

Fig. 1 Circuit Diagrams for Capacitance Test

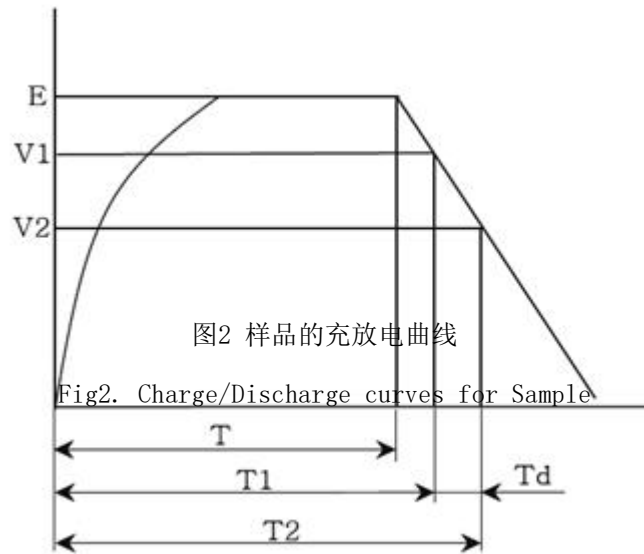


表 1 容量测试过程的参数设定要求

Table1 Demands for Capacitance' s Test

型号	充电电压 (E)	保护电阻 (R)	充电时间 (T)	放电电流 (I)	起始电压 (V ₁)	结束电压 (V ₂)
GTSP-3R8-206MR0813	3.8V	10Ω	1 hours	See table 2	3.8V	2.5V

表 2 容量测试过程的放电电流

Table2 The discharge current for different products during the Capacitance Test

型号	GTSP-3R8-206MR0813
GTSP-3R8-206MR0813	7.5mA

8.4 交流内阻测试 Test for AC Resistance

常温下，将单体充电至3.6V并恒压充电30min后，在1kHz条件下，采用交流阻抗仪进行交流内阻测试。

Charge the cell to 3.6V and keep this voltage for 30min, then using the AC Internal resistance to test its AC Resistance at 1kHz.

8.5 高低温性能测试 Test for Low-high Temperature

25±2℃条件下，将单体参照《7.3 容量测试》方式充电至3.8V后，紧接着将其转移至设定温度(设定温度分别为-20±2℃，25±2℃，65±2℃)条件下，在3.8V持续稳压的同时将样品放置1h。此后，将产品按照表2中放电电流要求在设定温度条件下进行容量测试。

Based on the 《7.3 Test for Capacitance》 charging the cell to 3.8V at 25±2℃, and move the cell to a fixed



temperature ($-20\pm 2^{\circ}\text{C}$, $25\pm 2^{\circ}\text{C}$, $65\pm 2^{\circ}\text{C}$), meantime charge the cell by constant voltage for 1h. After this, the cell's capacitance was tested at Table 2's current.

8.6 过充性能测试 Test for Over-charge properties

常温条件下, 将单体在表3电流条件下充电至4.2V, 然后以相同电流放电至2.5V, 循环1000次后检查产品外观, 并参照《7.3 容量测试》过程进行电化学性能测试。

According to Table 3's current, charging the cell to 4.2V at room temperature, and then discharge it to 2.5V at the same current. Once cycling 1000 times, check it's appearance, and the electrochemical properties were tested by 《7.3 Test for Capacitance》.

表 3 过充或充放电循环测试过程产品的电流设定值

Table 3 Values for Over-charge or Charge/discharge cycling current

型号	GTSPL-3R8-206MR0813
GTSPL-3R8-206MR0813	75mA

8.7 高温高湿存储特性 High temperature and high humidity storage properties

常温条件下, 将单体在表2电流条件下充电至3.6V并恒压充电1h, 后将其放置在 $60\pm 2^{\circ}\text{C}$ 、 $90\pm 2\%$ RH的条件下存储1000h。接着将其冷却至室温, 并参照《7.3 容量测试》和《7.4 交流内阻测试》方法测试样品的电化学特性。

Charge the cell to 3.6V at Table 2's current, and the charge 1h at constant voltage condition at room temperature. After this, put the cell to $60\pm 2^{\circ}\text{C}$ 、 $90\pm 2\%$ RH conditions to storage 1000h. Finally, cooling the cell at room temperature and check its electrochemical properties by 《7.3 Test for Capacitance》and 《7.4 Test for AC Resistance》.

8.8 充/放电循环性能测试 Charge/discharge cycling properties

常温条件下, 依据表3中电流值要求, 将单体充电至3.7V, 紧接着将其以该电流放电至3.1V循环100000次后, 参照《7.3 容量测试》和《7.4 交流内阻测试》要求测量其电化学特性。

According to Table 3's requirements, charge the cell to 3.7V at room temperature, and the discharge it to 3.1V at the same current. Once cycling 100000times, re-checking its electrochemical properties by 《7.3 Test for Capacitance》 and 《7.4 Test for AC Resistance》.

8.9 高温浮充性能测试 The floating test properties at high temperature

将产品置于 $55\pm 2^{\circ}\text{C}$ 条件下, 根据表3电流值要求将单体充电至3.8V, 后在该条件下稳压1000h。紧接着将其自然冷却至室温, 并参照《7.3 容量测试》和《7.4 交流内阻测试》要求进行电化学特性测试。

According to Table 3's requirements, charge the cell to 3.8V at $55\pm 2^{\circ}\text{C}$, and kept the cell at this condition for 1000h. After this, cooling the cell to room temperature and testing its electrochemical properties by 《7.3 Test for Capacitance》 and 《7.4 Test for AC Resistance》.

9. 注意事项 Notice

9.1 使用 During Operation

- ❖ 锂离子电容器的使用温度不宜超过额定温度上限或下限。

Working temperature of LIC should not exceed the upper and lower limits of the rated temperature.

- ❖ 锂离子电容器应在额定电压区间下使用。

LIC should be used at rated voltage.

- ❖ 锂离子电容器在使用之前请确认极性，禁止反接。

Check the polarity of LIC before power on. No reverse connecting.

- ❖ 外界环境温度对锂离子 电容器的寿命具有重要影响，请远离热源。

Keep LIC away from heat. The temperature has a big influence on the working life of LIC.

- ❖ 锂离子电容器请勿直接接触水、油、酸或碱。

No direct contacting with water, oil, acid or alkaline.

- ❖ 请勿挤压、钉刺或拆解锂离子电容器。

No crushing, nail penetrating or disassembling LIC.

- ❖ 请勿随意丢弃锂离子电容器，废弃时请根据国家环保标准进行处理。


No discarding. Dispose LIC based on the State Environmental-protection Standard.

- ❖ 本产品发货前已具有一定电压值，使用过程切勿使正负极端子短路，常见产品短路情况如下表所示。

The cell embraced constant voltage before shipment, therefore, the short circuit should be extremely forbidden. Familiar short circuit is shown in the following table 4.

表 4 常见的使用过程中产品短路情形

Table 4 Familiar short circuit situation
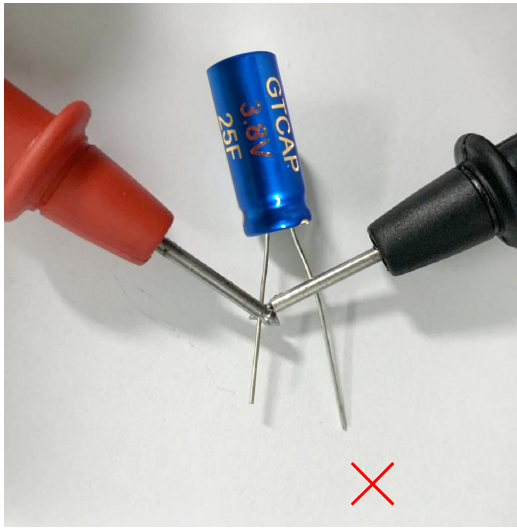
<p>测量中发生短路 Short Circuit during Testing</p>	<p>产品处理中发生短路 Short Circuit during connecting</p>
	

<p>产品放置在一起导致引线接触 Radial connecting during the storage or moving processes</p>	<p>发生短路 Short circuit</p>

9.2 储存 Storage


- ❖ 锂离子电容器不可处于相对湿度为85%以上或含有有毒气体的场所，该种环境下引线及壳体易受潮及腐蚀，导致锂离子电容器断路。

No storage in a condition with a relative humidity exceeding 85% or with toxic gases. It is easy to cause the damage and corrosion of the terminals and case, resulting in disconnection.

- ❖ 锂离子电容器若需长期储存，请在温度10~55℃，相对湿度60%以下，通风良好的场所存放，严禁暴晒。

For Long-term storage, place LIC in a well-ventilated condition at 10 to 55℃, with a relative humidity below 60%. Forbidden to sun directly.

9.3 包装 Packaging

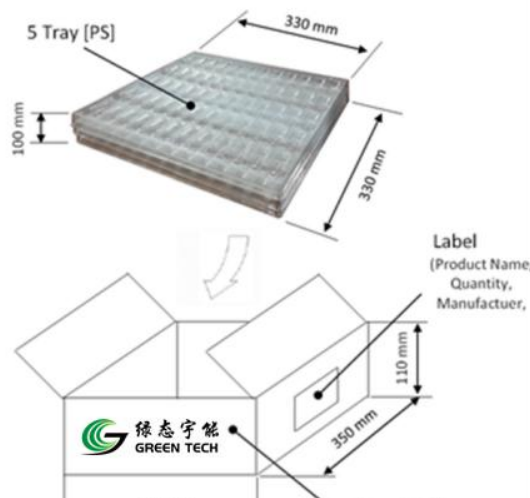

型号系列 Series	数量(个)Numbers			尺寸(Size) (W × L × H, mm)	重量(Mass) (Kg)
	托盘 Tray	内盒/分区 District	外箱 Box		
GTSPL-3R8-206MR0813	60	300	1200	710 x 710 x 230	5.0